

General Specifications

ARM15A, ARM55□,
ARS15B, ARS15M, ARS55M
Relay Boards (for FIO)



GS 33J60H60-01EN

[Release 6]

■ GENERAL

This document describes the specifications of relay board used in FIO subsystem of CENTUM VP. Relay input/output boards are connected in between digital input/output modules (for FIO) and field devices. Relay input boards receive contact signals or voltage input signals of field devices. Relay output boards receive output signals of the digital output module and amplify by the relay, and then output to field devices. These relay boards support dual-redundant digital input/output modules (for FIO).

■ STANDARD SPECIFICATIONS

● Relay Boards

Models	Descriptions	Contact Points	Terminals	Signal Cables	Connectable Digital I/O Modules	
					Modules	Terminal Blocks
ARM15A	Mechanical Relay Board	32-point	M4 screws	AKB331 (for 32-point)	ADV151	ATD5A
				AKB337 (for 64-point)	ADV161	—
ARM55D		32-point	M4 screws	AKB331 (for 32-point)	ADV551	ATD5A
				AKB337 (for 64-point)	ADV561	—
ARM55W		32-point	M4 screws	AKB331 (for 32-point)	ADV551	ATD5A
				AKB337 (for 64-point)	ADV561	—
ARM55T		32-point	M4 screws	AKB331 (for 32-point)	ADV551	ATD5A
				AKB337 (for 64-point)	ADV561	—
ARM55C		32-point	M3.5 screws (M4 in power input part)	AKB331 (for 32-point)	ADV551	ATD5A
				AKB337 (for 64-point)	ADV561	—
ARS15B-5 (48 V DC) ARS15B-6 (110 V DC)	Solid State Relay Board	32-point	M4 screws	AKB331 (for 32-point)	ADV151	ATD5A
				AKB337 (for 64-point)	ADV161	—
ARS15M-1 (100 V AC) ARS15M-2 (220 V AC) ARS15M-3 (10 - 30 V DC)		32-point	Pressure clamp terminals	AKB331 (for 32-point)	ADV151	ATD5A
				AKB337 (for 64-point)	ADV161	—
ARS55M-1 (100 V AC) ARS55M-2 (220 V AC) ARS55M-3 (5 - 60 V DC)		32-point	Pressure clamp terminals	AKB331 (for 32-point)	ADV551	ATD5A
				AKB337 (for 64-point)	ADV561	—

● Relay Boards Detail Specifications

Mechanical Relay Boards (Contact Input)

Model	ARM15A
Usage	Mechanical Relay Contact Input (Single / Dual-redundant)
Contact Points	32-point
Terminals for Field Device Connection	M4 screws
Modules	ADV151 (DI: 32-point) + ATD5A (Terminal block) ADV161 (DI: 64-point) (*1)
Signal Cables	AKB331 (for 32-point) AKB337 (for 64-point)
Contact Input Signal	ON signal: 150 Ω or less OFF signal: At least 200 kΩ
External Contact Rating (*2)	30 V DC or more, 20 mA or more
Minimum Load (*3)	21.6 V DC or less, 13 mA or less
Power Supply Voltage and Current Consumption of Internal Circuit (require external power supply)	24 V DC Max. 0.32 A
Power Supply for Field Device (require external power supply)	Dual-line (supply power per 16-point) 24 V DC: Max. 0.3 A per one line
Insulation Resistance	At least 10 MΩ (500 V DC)
Withstanding Voltage	Between field device terminals and cases: 1.5 kV AC for 1 minute Between 24 V power terminals and cases: 500 V AC for 1 minute Between 24 V power terminals and field device terminals: 1.5 kV AC for 1 minute
Ambient Temperature and Humidity	0 to 50 °C, 10 to 90%RH
Size	W: 482.6 mm x H: 132.5 mm (3U)
Weight	Approx. 2.2 kg

*1: Two sets of relay board (ARM15A) and two sets of signal cable (AKB337) are required for one ADV161.

*2: It is voltage/current that ARM15A applies to the external contact signal source.

*3: It means a minimum applicable load of the external contact signal source.


Mechanical Relay Boards (Contact Output)

Models	ARM55D	ARM55W ARM55T (with switch)	ARM55C
Usage	Mechanical Relay Dry Contact Output ("a" contact (NO)) (Single / Dual-redundant)	Mechanical Relay Wet Contact Output (Single / Dual-redundant) AUTO/OFF/ON switch (only for ARM55T)	Mechanical Relay Dry Contact Output ("a" contact or "b" contact (NO or NC)) (Single / Dual-redundant) (*5)
Contact Points	32-point	32-point	32-point
Terminals for Field Device Connection	M4 screws	M4 screws	M3.5 screws (*4) (M4 in power input part)
Modules	ADV551 (DO: 32-point) + ATD5A (Terminal block) ADV561 (DO: 64-point) (*1)	ADV551 (DO: 32-point) + ATD5A (Terminal block) ADV561 (DO: 64-point) (*1)	ADV551 (DO: 32-point) + ATD5A (Terminal block) ADV561 (DO: 64-point) (*1)
Signal Cables	AKB331 (for 32-point) AKB337 (for 64-point)	AKB331 (for 32-point) AKB337 (for 64-point)	AKB331 (for 32-point) AKB337 (for 64-point)
Maximum Load (*2)	250 V AC: 2 A per point 30 V DC: 2 A per point 125 V DC: 0.1 A per point (*3)	250 V AC: 0.6 A per point 30 V DC: 0.6 A per point 125 V DC: 0.1 A per point (*3)	30 V DC: 1.5 A per point
Minimum Load	5 V, 10 mA	5 V, 10 mA	5 V, 10 mA
Power Supply Voltage and Current Consumption of Internal Circuit (require external power supply)	24 V DC Max. 0.65 A	24 V DC Max. 0.65 A	24 V DC Max. 0.85 A
Power Supply for Field Device (require external power supply)	—	Dual-line (supply power per 16-point) 250 V AC: Max. 9.6 A 30 V DC: Max. 9.6 A 125 V DC: Max. 1.6 A	—
Insulation Resistance	At least 10 MΩ (500 V DC)	At least 10 MΩ (500 V DC)	At least 10 MΩ (500 V DC)
Withstanding Voltage	Between field device terminals and cases: 3 kV AC for 1 minute Between 24 V power terminals and cases: 500 V AC for 1 minute Between 24 V power terminals and field device terminals: 3 kV AC for 1 minute	Between field device terminals and cases: 3 kV AC for 1 minute Between 24 V power terminals and cases: 500 V AC for 1 minute Between 24 V power terminals and field device terminals: 3 kV AC for 1 minute	Between field device terminals and cases: 2 kV AC for 1 minute Between 24 V power terminals and cases: 500 V AC for 1 minute Between 24 V power terminals and field device terminals: 2 kV AC for 1 minute
Ambient Temperature and Humidity	0 to 50 °C, 10 to 90%RH	0 to 50 °C, 10 to 90%RH	0 to 50 °C, 10 to 90%RH
Size	W: 482.6 mm x H: 132.5 mm (3U)	W: 482.6 mm x H: 177 mm (4U)	W: 482.6 mm x H: 132.5 mm (3U)
Weight	Approx. 2.2 kg	Approx. 2.6 kg	Approx. 2.2 kg

- *1: Two sets of relay board (ARM55D, ARM55W, ARM55T, or ARM55C) and two sets of signal cable (AKB337) are required for one ADV561.
- *2: For inductive loads, connect a protection circuit (RC circuit for AC; diode for DC) for noise in parallel with loads.
- *3: For DC, 30 V or less is the requirement for the Safety Standard.
- *4: The applicable size of solderless lug is described below.

[Solderless Lug Dimensions]

Nominal cross sectional area (mm ²)	Screw used (mm)	Hole diameter (mm)	Lug outside diameter (mm)	Lug length (mm)	Insulation covering inside diameter (mm)	Dimension "C" (mm)
1.25	3.5	3.7 or more	6.8 or less	Approx. 21	3.6 or more	4.0 or more
2.0	3.5	3.7 or more	6.8 or less	Approx. 21	4.3 or more	4.0 or more

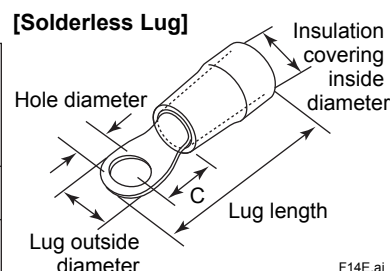

F14E.ai

- *5: Select either "a" contact or "b" contact.

Solid State Relay Boards (Contact Input)

Models	ARS15B-5 (48 V DC), ARS15B-6 (110 V DC)
Usage	Solid State Relay Contact Input (Single / Dual-redundant)
Contact Points	32-point
Terminals for Field Device Connection	M4 screws
Modules	ADV151 (DI: 32-point) + ATD5A (Terminal block) ADV161 (DI: 64-point) (*1)
Signal Cables	AKB331 (for 32-point) AKB337 (for 64-point)
Contact Input Signal	ON signal: 200 Ω or less OFF signal: At least 200 kΩ
External Contact Rating	ARS15B-5 (48 V DC): At least 60 V DC, 20 mA ARS15B-6 (110 V DC): At least 140 V DC, 20 mA
Power Supply Voltage and Current Consumption of Internal Circuit (require external power supply)	24 V DC Max. 0.32 A
Power Supply for Field Device (require external power supply)	Dual-line (supply power per 32-point) ARS15B-5 (48 V DC): 48 V DC; Max. 0.5 A per one line ARS15B-6 (110 V DC): 110 V DC; Max. 0.4 A per one line
Insulation Resistance	At least 10 MΩ (500 V DC)
Withstanding Voltage	Between field device terminals and cases: 2 kV AC for 1 minute Between 24 V power terminals and cases: 500 V AC for 1 minute Between 24 V power terminals and field device terminals: 2 kV AC for 1 minute
Ambient Temperature and Humidity	0 to 50 °C, 10 to 90%RH
Size	W: 482.6 mm x H: 132.5 mm (3U)
Weight	Approx. 2.5 kg

*1: Two sets of relay board (ARS15B-5, or ARS15B-6) and two sets of signal cable (AKB337) are required for one ADV161.

Solid State Relay Boards (Voltage Input)

Models	ARS15M-1 (100 V AC), ARS15M-2 (220 V AC), ARS15M-3 (10 - 30 V DC)
Usage	Solid State Relay Voltage Input, Module type (Single / Dual-redundant)
Contact Points	32-point
Terminals for Field Device Connection	Pressure clamp terminals Cable specifications: see the table of terminal treatment for the pressure clamp terminal signal line and power line.
Modules	ADV151 (DI: 32-point) + ATD5A (Terminal block) ADV161 (DI: 64-point) (*1)
Signal Cables	AKB331 (for 32-point) AKB337 (for 64-point)
Contact Input Signal	ARS15M-1 (100 V AC) ON signal: 90 to 140 V AC OFF signal: 45 V AC or less ARS15M-2 (220 V AC) ON signal: 180 to 250 V AC OFF signal: 45 V AC or less ARS15M-3 (10 - 30 V DC) ON signal: 10 to 30 V DC OFF signal: 1 V DC or less
External Contact Rating	—
Power Supply Voltage and Current Consumption of Internal Circuit (require external power supply)	24 V DC Max. 1.0 A
Power Supply for Field Device	—
Insulation Resistance	At least 10 MΩ (500 V DC)
Withstanding Voltage	Between 24 V power terminals and field device terminals: 2.3 kV AC for 1 minute
Ambient Temperature and Humidity	0 to 50 °C, 10 to 90%RH
Size	W: 436 mm x H: 125.4 mm
Weight	Approx. 3.0 kg

*1: Two sets of relay board (ARS15M-1, ARS15M-2, or ARS15M-3) and two sets of signal cable (AKB337) are required for one ADV161.

Solid State Relay Boards (Voltage Output)

Models	ARS55M-1 (100 V AC)	ARS55M-2 (220 V AC)	ARS55M-3 (5 - 60 V DC)
Usage	Solid State Relay TRIAC Output, Transistor output (Single / Dual-redundant)		
Contact Points	32-point		
Terminals for Field Device Connection	Pressure clamp terminals Cable specifications: see the table of terminal treatment for the pressure clamp terminal signal line and power line.		
Modules	ADV551 (DO: 32-point) + ATD5A (Terminal block) ADV561 (DO: 64-point) (*1)		
Signal Cables	AKB331 (for 32-point) AKB337 (for 64-point)		
Output Voltage/Current Range (*2)	24 to 140 V AC 30 mA to 2.5 A (Ambient temperature is under 20 °C) 30 mA to 2 A (at 20 to 35 °C) 30 mA to 1.5 A (at 35 to 40 °C) 30 mA to 1.3 A (at 40 to 50 °C) Inductive load must be 1.5 A or less, even when ambient temperature is under 35 °C.	24 to 250 V AC 30 mA to 2.5 A (Ambient temperature is under 20 °C) 30 mA to 2 A (at 20 to 35 °C) 30 mA to 1.5 A (at 35 to 40 °C) 30 mA to 1.3 A (at 40 to 50 °C) Inductive load must be 1.5 A or less, even when ambient temperature is under 35 °C.	5 to 60 V DC 20 mA to 2.5 A (Ambient temperature is under 20 °C) 20 mA to 2 A (at 20 to 35 °C) 20 mA to 1.3 A (at 35 to 50 °C) Inductive load must be 1.5 A or less.
Power Supply Voltage and Current Consumption of Internal Circuit (require external power supply)	24 V DC Max. 0.9 A		
Power Supply for Field Device	—		
Insulation Resistance	At least 10 MΩ (500 V DC)		
Withstanding Voltage	Between 24 V power terminals and field device terminals: 2.3 kV AC for 1 minute		
Ambient Temperature and Humidity	0 to 50 °C, 10 to 90%RH		
Size	W: 436 mm x H: 125.4 mm		
Weight	Approx. 3.0 kg		

*1: Two sets of relay board (ARS55M-1, ARS55M-2, or ARS55M-3) and two sets of signal cable (AKB337) are required for one ADV561.

*2: For inductive loads, connect a protection circuit (RC circuit for AC; diode for DC) for noise in parallel with loads.

Table: Terminal Treatment for Pressure Clamp Terminal Signal Line


	Cable Thickness (mm ²)	Peel-off Length (mm)	Inserting Part of Sleeve (mm)
Without Sleeves	0.5 to 2 (AWG20 to 14)	8	—
With Sleeves	0.5 to 2 (AWG20 to 14)	8	8

Table: Terminal Treatment for Pressure Clamp Terminal Power Line

	Cable Thickness (mm ²)	Peel-off Length (mm)	Inserting Part of Sleeve (mm)
Without Sleeves	0.5 to 2 (AWG20 to 14)	9	—
With Sleeves	0.5 to 1.5 (AWG20 to 16)	9	8


● Relay Input/Output Board Circuit Diagram

ARM15A

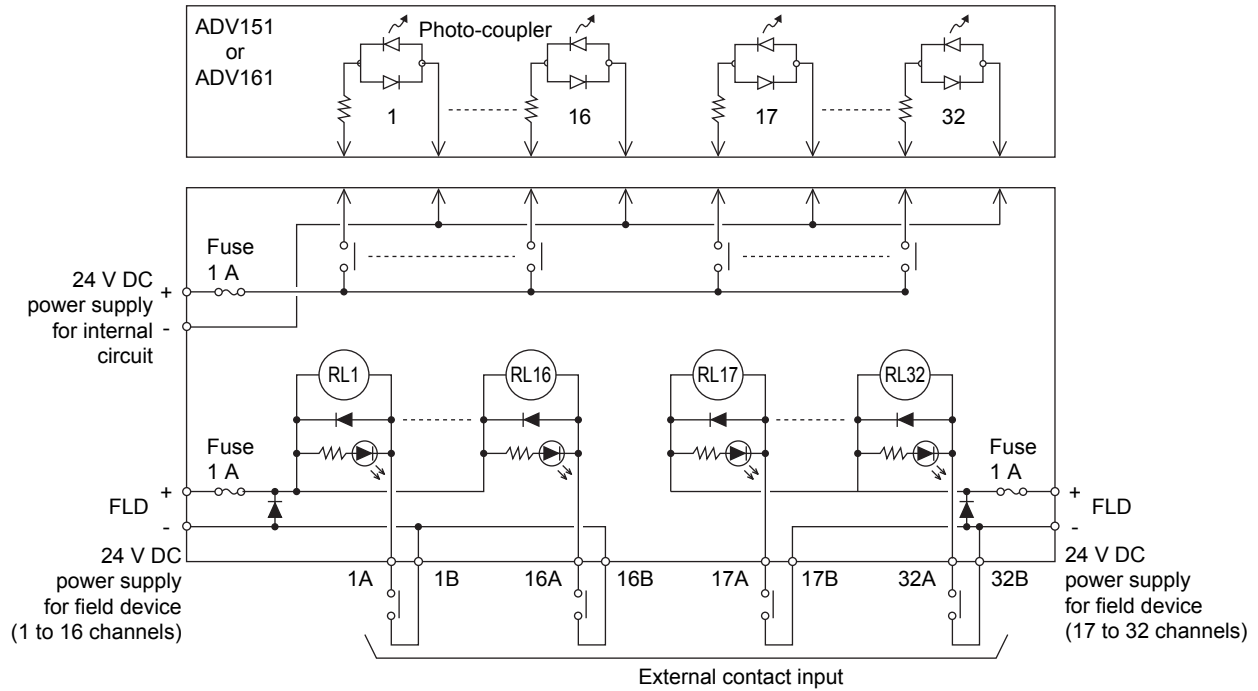


F01E.ai

ARM55D

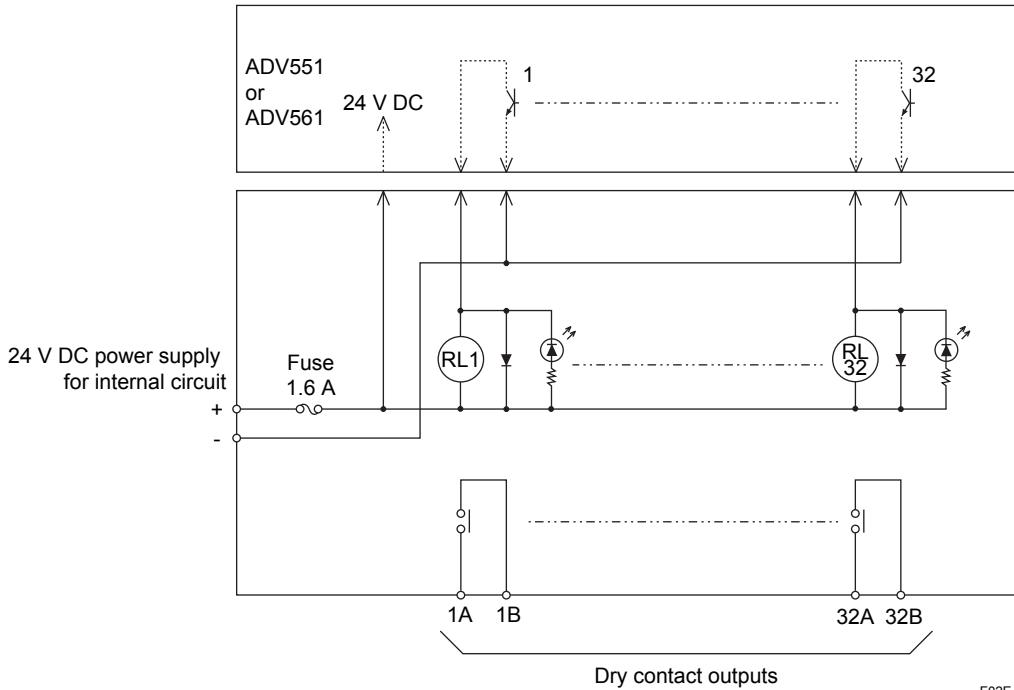


F02E.ai

ARM55W

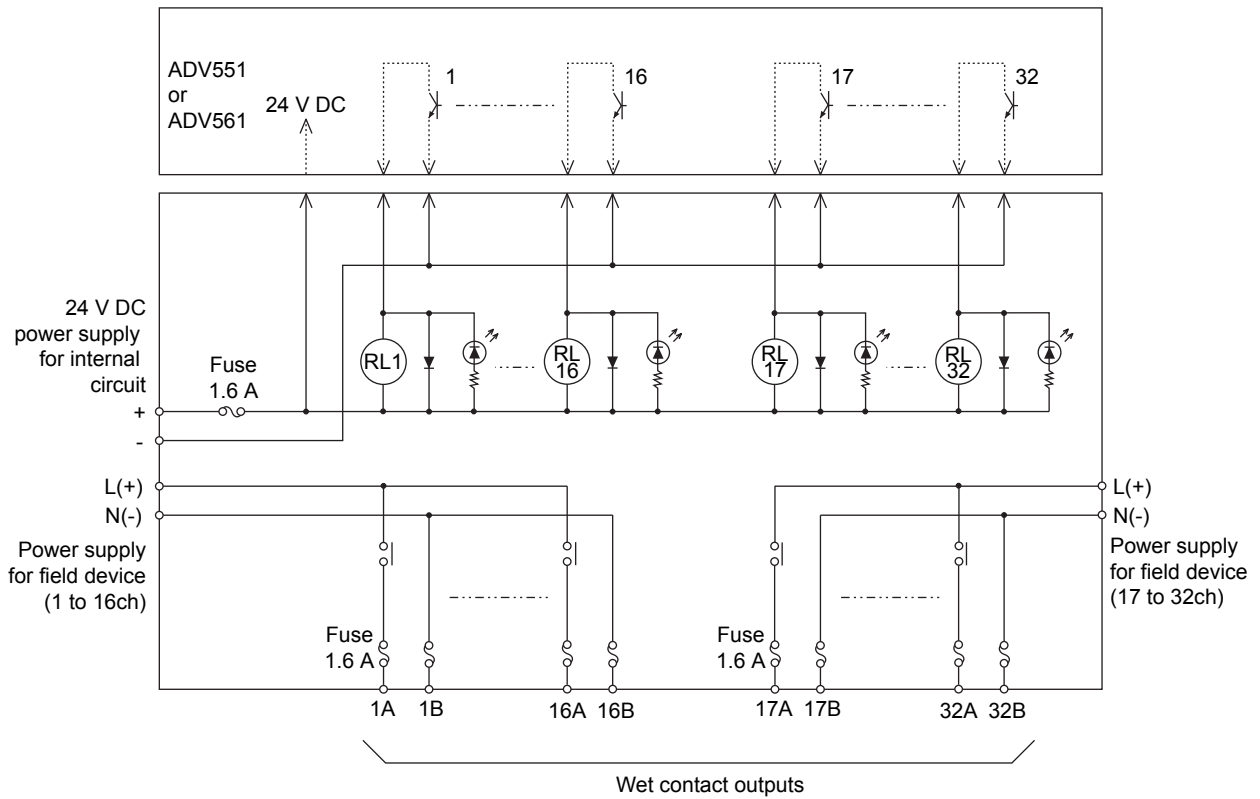


F03E.ai

ARM55T

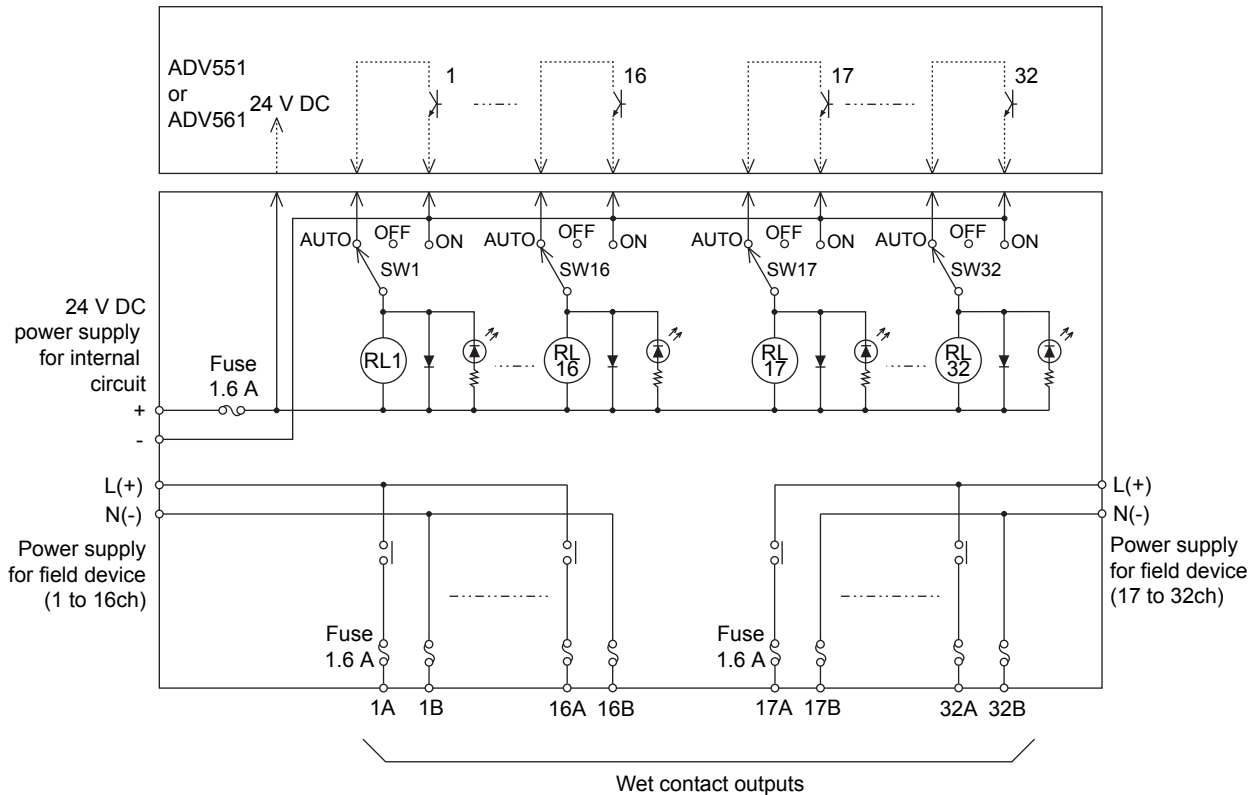


F26E.ai

ARM55C

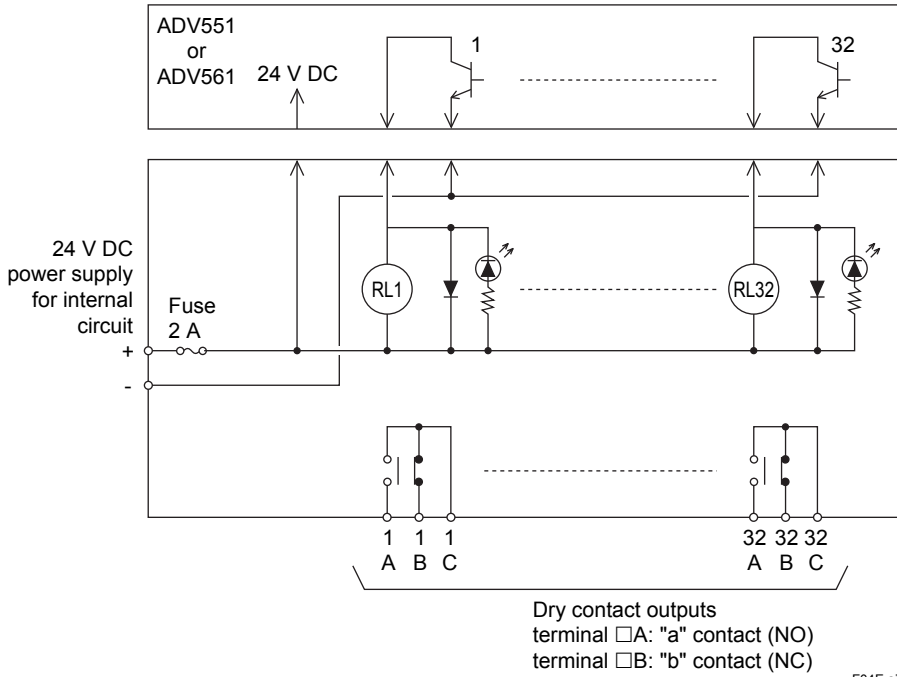


F04E.ai

ARS15B

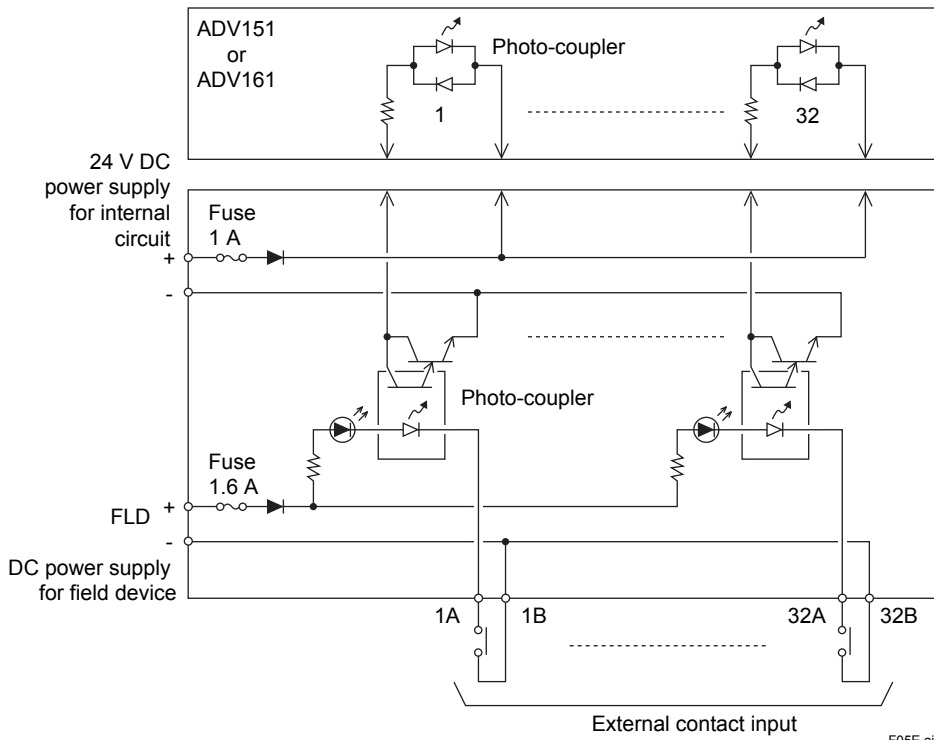


F05E.ai

ARS15M

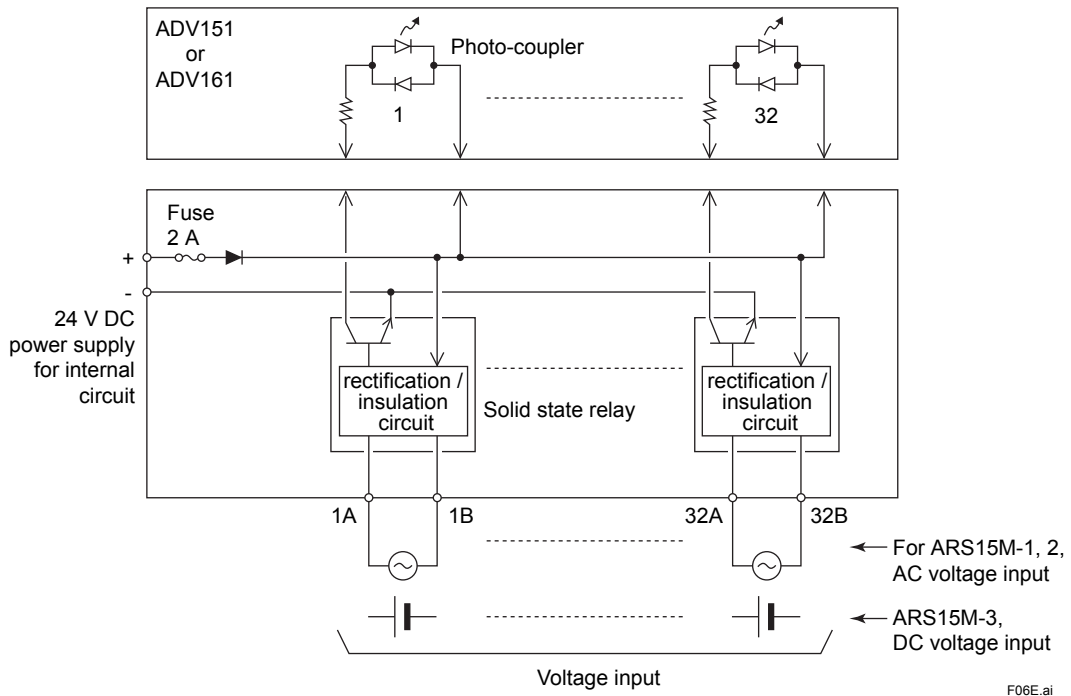

F06E.ai


ARS55M

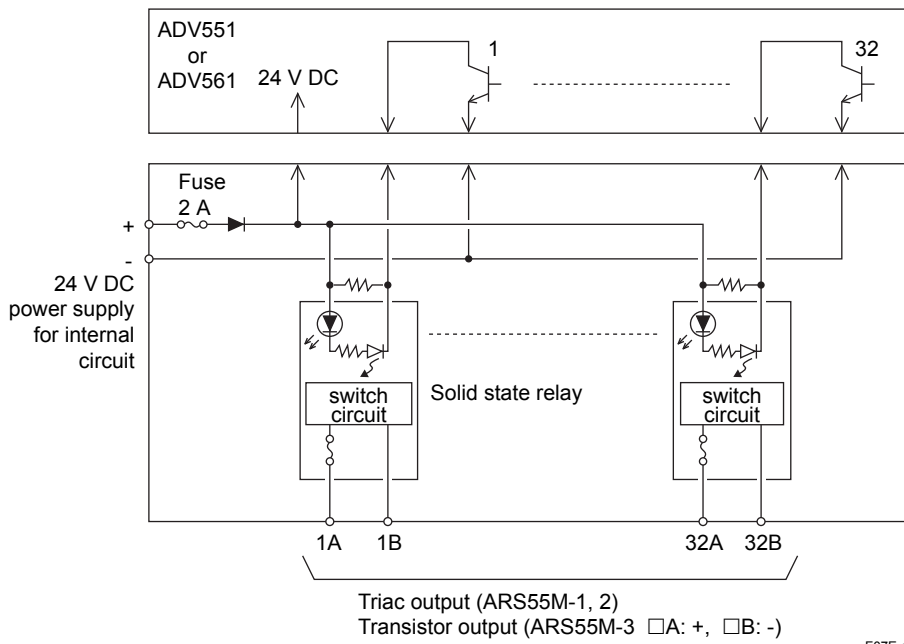

F07E.ai

● Terminals for Field Device Connection

ARM15A

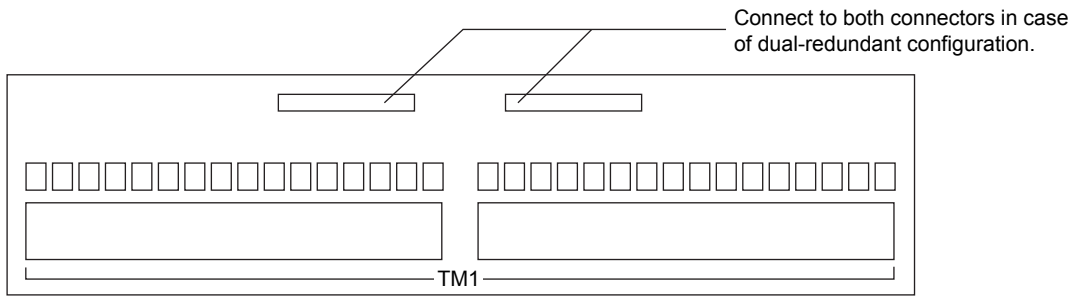

TM1 (Left side)

Signal name	LL (+)	IN1A	IN2A	IN3A	IN4A	IN5A	IN6A	IN7A	IN8A	IN9A	IN10A	IN11A	IN12A	IN13A	IN14A	IN15A	IN16A	N.C.
Terminal No.	FLD(+)	1A	2A	3A	4A	5A	6A	7A	8A	9A	10A	11A	12A	13A	14A	15A	16A	NC
Signal name	LN (-)	IN1B	IN2B	IN3B	IN4B	IN5B	IN6B	IN7B	IN8B	IN9B	IN10B	IN11B	IN12B	IN13B	IN14B	IN15B	IN16B	N.C.


TM1 (Right side)

Signal name	RL (+)	IN17A	IN18A	IN19A	IN20A	IN21A	IN22A	IN23A	IN24A	IN25A	IN26A	IN27A	IN28A	IN29A	IN30A	IN31A	IN32A	24 V
Terminal No.	FLD(+)	17A	18A	19A	20A	21A	22A	23A	24A	25A	26A	27A	28A	29A	30A	31A	32A	+
Signal name	RN (-)	IN17B	IN18B	IN19B	IN20B	IN21B	IN22B	IN23B	IN24B	IN25B	IN26B	IN27B	IN28B	IN29B	IN30B	IN31B	IN32B	0 V

F08E.ai

Note: The terminal N.C. in the figure is an unused terminal; wiring is not required.
 When connecting signals to adjacent terminals, make sure the insulation-covering parts of solderless lug do not overlap each other.

ARM55D

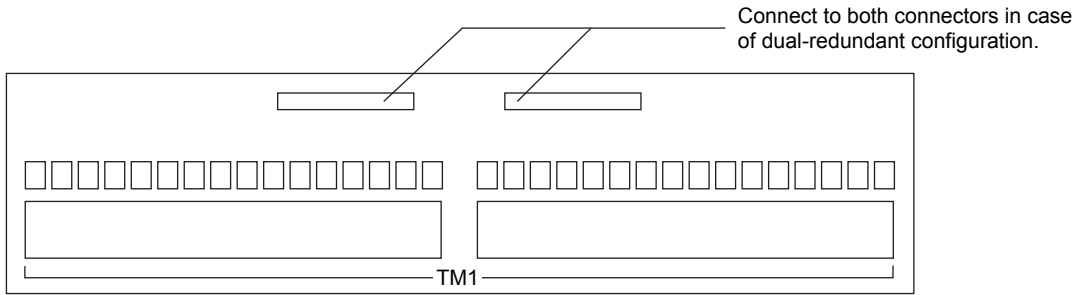

TM1 (Left side)

Signal name	OUT 1A	OUT 2A	OUT 3A	OUT 4A	OUT 5A	OUT 6A	OUT 7A	OUT 8A	OUT 9A	OUT 10A	OUT 11A	OUT 12A	OUT 13A	OUT 14A	OUT 15A	OUT 16A	N.C.	N.C.
Terminal No.	1A	2A	3A	4A	5A	6A	7A	8A	9A	10A	11A	12A	13A	14A	15A	16A	NC	NC
Signal name	OUT 1B	OUT 2B	OUT 3B	OUT 4B	OUT 5B	OUT 6B	OUT 7B	OUT 8B	OUT 9B	OUT 10B	OUT 11B	OUT 12B	OUT 13B	OUT 14B	OUT 15B	OUT 16B	N.C.	N.C.


TM1 (Right side)

Signal name	OUT 17A	OUT 18A	OUT 19A	OUT 20A	OUT 21A	OUT 22A	OUT 23A	OUT 24A	OUT 25A	OUT 26A	OUT 27A	OUT 28A	OUT 29A	OUT 30A	OUT 31A	OUT 32A	N.C.	24 V
Terminal No.	17A	18A	19A	20A	21A	22A	23A	24A	25A	26A	27A	28A	29A	30A	31A	32A	NC	+
Signal name	OUT 17B	OUT 18B	OUT 19B	OUT 20B	OUT 21B	OUT 22B	OUT 23B	OUT 24B	OUT 25B	OUT 26B	OUT 27B	OUT 28B	OUT 29B	OUT 30B	OUT 31B	OUT 32B	N.C.	0 V

F09E.ai

Note: The terminal N.C. in the figure is an unused terminal; wiring is not required.
 When connecting signals to adjacent terminals, make sure the insulation-covering parts of solderless lug do not overlap each other.

ARM55W, ARM55T

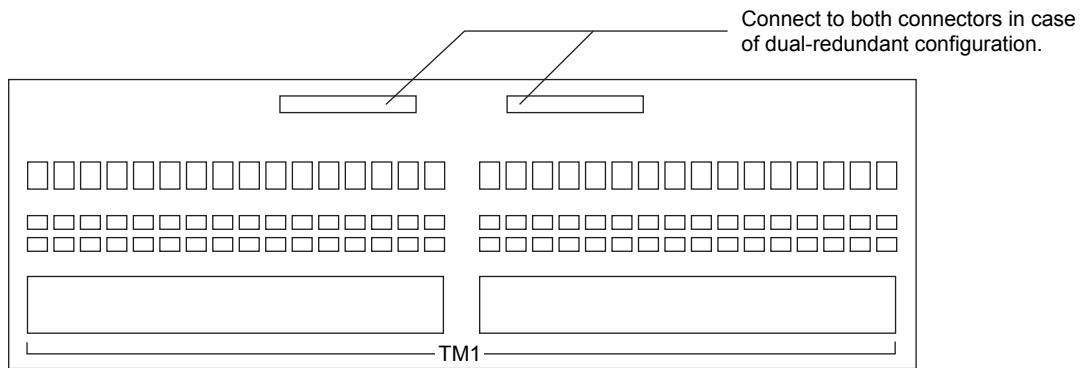

TM1 (Left side)

Signal name	LL (+)	OUT 1A	OUT 2A	OUT 3A	OUT 4A	OUT 5A	OUT 6A	OUT 7A	OUT 8A	OUT 9A	OUT 10A	OUT 11A	OUT 12A	OUT 13A	OUT 14A	OUT 15A	OUT 16A	N.C.
Terminal No.	L(+)	1A	2A	3A	4A	5A	6A	7A	8A	9A	10A	11A	12A	13A	14A	15A	16A	NC
Signal name	LN (-)	OUT 1B	OUT 2B	OUT 3B	OUT 4B	OUT 5B	OUT 6B	OUT 7B	OUT 8B	OUT 9B	OUT 10B	OUT 11B	OUT 12B	OUT 13B	OUT 14B	OUT 15B	OUT 16B	N.C.


TM1 (Right side)

Signal name	RL (+)	OUT 17A	OUT 18A	OUT 19A	OUT 20A	OUT 21A	OUT 22A	OUT 23A	OUT 24A	OUT 25A	OUT 26A	OUT 27A	OUT 28A	OUT 29A	OUT 30A	OUT 31A	OUT 32A	24 V
Terminal No.	L(+)	17A	18A	19A	20A	21A	22A	23A	24A	25A	26A	27A	28A	29A	30A	31A	32A	+
Signal name	RN (-)	OUT 17B	OUT 18B	OUT 19B	OUT 20B	OUT 21B	OUT 22B	OUT 23B	OUT 24B	OUT 25B	OUT 26B	OUT 27B	OUT 28B	OUT 29B	OUT 30B	OUT 31B	OUT 32B	0 V

F10E.ai

Note: The terminal N.C. in the figure is an unused terminal; wiring is not required.
When connecting signals to adjacent terminals, make sure the insulation-covering parts of solderless lug do not overlap each other.

ARM55C

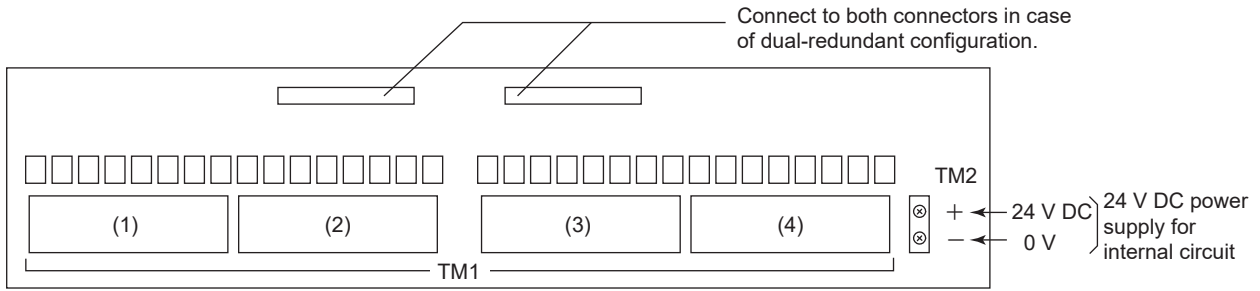

TM1 (1)

Signal name	OUT 1A	OUT 2A	OUT 3A	OUT 4A	OUT 5A	OUT 6A	OUT 7A	OUT 8A
Terminal No.	1A	2A	3A	4A	5A	6A	7A	8A
	1B	2B	3B	4B	5B	6B	7B	8B
	1C	2C	3C	4C	5C	6C	7C	8C
Signal name	OUT 1C	OUT 2C	OUT 3C	OUT 4C	OUT 5C	OUT 6C	OUT 7C	OUT 8C
Signal name	OUT 1B	OUT 2B	OUT 3B	OUT 4B	OUT 5B	OUT 6B	OUT 7B	OUT 8B

TM1 (2)

Signal name	OUT 9A	OUT 10A	OUT 11A	OUT 12A	OUT 13A	OUT 14A	OUT 15A	OUT 16A
Terminal No.	9A	10A	11A	12A	13A	14A	15A	16A
	9B	10B	11B	12B	13B	14B	15B	16B
	9C	10C	11C	12C	13C	14C	15C	16C
Signal name	OUT 9C	OUT 10C	OUT 11C	OUT 12C	OUT 13C	OUT 14C	OUT 15C	OUT 16C
Signal name	OUT 9B	OUT 10B	OUT 11B	OUT 12B	OUT 13B	OUT 14B	OUT 15B	OUT 16B

TM1 (3)

Signal name	OUT 17A	OUT 18A	OUT 19A	OUT 20A	OUT 21A	OUT 22A	OUT 23A	OUT 24A
Terminal No.	17A	18A	19A	20A	21A	22A	23A	24A
	17B	18B	19B	20B	21B	22B	23B	24B
	17C	18C	19C	20C	21C	22C	23C	24C
Signal name	OUT 17C	OUT 18C	OUT 19C	OUT 20C	OUT 21C	OUT 22C	OUT 23C	OUT 24C
Signal name	OUT 17B	OUT 18B	OUT 19B	OUT 20B	OUT 21B	OUT 22B	OUT 23B	OUT 24B

TM1 (4)

Signal name	OUT 25A	OUT 26A	OUT 27A	OUT 28A	OUT 29A	OUT 30A	OUT 31A	OUT 32A
Terminal No.	25A	26A	27A	28A	29A	30A	31A	32A
	25B	26B	27B	28B	29B	30B	31B	32B
	25C	26C	27C	28C	29C	30C	31C	32C
Signal name	OUT 25C	OUT 26C	OUT 27C	OUT 28C	OUT 29C	OUT 30C	OUT 31C	OUT 32C
Signal name	OUT 25B	OUT 26B	OUT 27B	OUT 28B	OUT 29B	OUT 30B	OUT 31B	OUT 32B

TM2


24 V DC

0 V

Note: When connecting signals to adjacent terminals, make sure the insulation-covering parts of solderless lug do not overlap each other.

F11E.ai

ARS15B

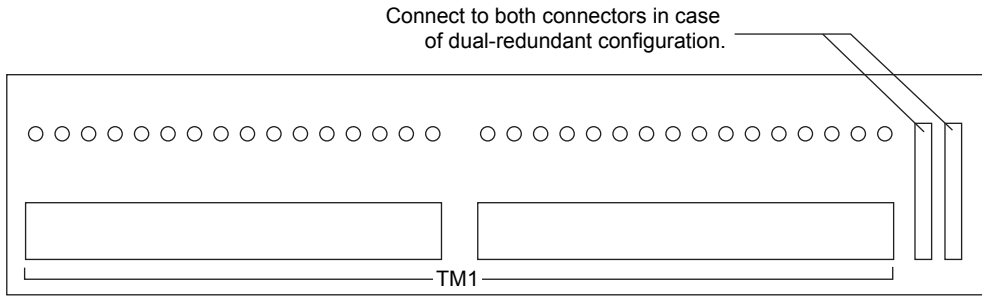

TM1 (Left side)

Signal name	L (+)	IN1A	IN2A	IN3A	IN4A	IN5A	IN6A	IN7A	IN8A	IN9A	IN10A	IN11A	IN12A	IN13A	IN14A	IN15A	IN16A
Terminal No.	FLD(+)	1A	2A	3A	4A	5A	6A	7A	8A	9A	10A	11A	12A	13A	14A	15A	16A
Signal name	FLD(-)	1B	2B	3B	4B	5B	6B	7B	8B	9B	10B	11B	12B	13B	14B	15B	16B
Signal name	N (-)	IN1B	IN2B	IN3B	IN4B	IN5B	IN6B	IN7B	IN8B	IN9B	IN10B	IN11B	IN12B	IN13B	IN14B	IN15B	IN16B


TM1 (Right side)

Signal name	IN17A	IN18A	IN19A	IN20A	IN21A	IN22A	IN23A	IN24A	IN25A	IN26A	IN27A	IN28A	IN29A	IN30A	IN31A	IN32A	24 V
Terminal No.	17A	18A	19A	20A	21A	22A	23A	24A	25A	26A	27A	28A	29A	30A	31A	32A	+
Signal name	IN17B	IN18B	IN19B	IN20B	IN21B	IN22B	IN23B	IN24B	IN25B	IN26B	IN27B	IN28B	IN29B	IN30B	IN31B	IN32B	0 V

F12E.ai

Note: When connecting signals to adjacent terminals, make sure the insulation-covering parts of solderless lug do not overlap each other.

ARS15M, ARS55M

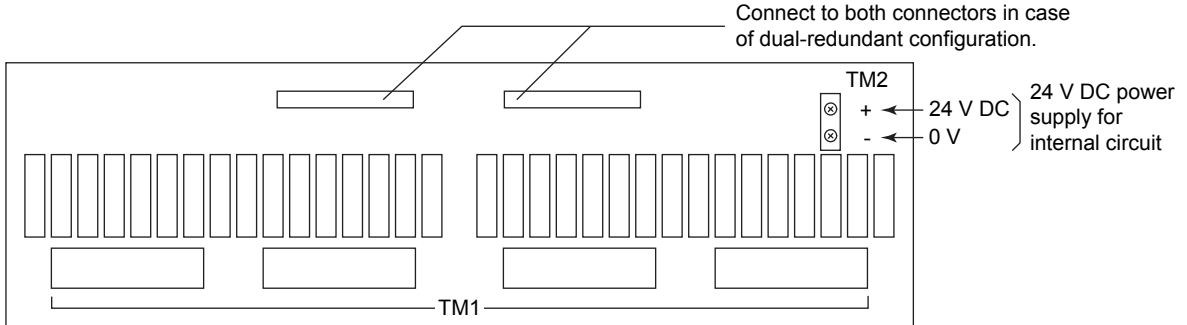

TM1

Signal name (ARS15M)	IN1	IN2	IN3	IN4	IN5	IN6	IN7	IN8	IN9	IN10	IN11	IN12	IN13	IN14	IN15	IN16
Signal name (ARS55M)	OUT1	OUT2	OUT3	OUT4	OUT5	OUT6	OUT7	OUT8	OUT9	OUT10	OUT11	OUT12	OUT13	OUT14	OUT15	OUT16
Terminal No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
	A B	A B	A B	A B	A B	A B	A B	A B	A B	A B	A B	A B	A B	A B	A B	A B

Signal name (ARS15M)	IN17	IN18	IN19	IN20	IN21	IN22	IN23	IN24	IN25	IN26	IN27	IN28	IN29	IN30	IN31	IN32
Signal name (ARS55M)	OUT17	OUT18	OUT19	OUT20	OUT21	OUT22	OUT23	OUT24	OUT25	OUT26	OUT27	OUT28	OUT29	OUT30	OUT31	OUT32
Terminal No.	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
	A B	A B	A B	A B	A B	A B	A B	A B	A B	A B	A B	A B	A B	A B	A B	A B

F13E.ai


Note: For ARS55M-3 and ARS15M-3, terminal number "A" is for "+", "B" is for "-."

■ EXTERNAL DIMENSIONS

● ARM15A

Other than /BR3


Unit: mm

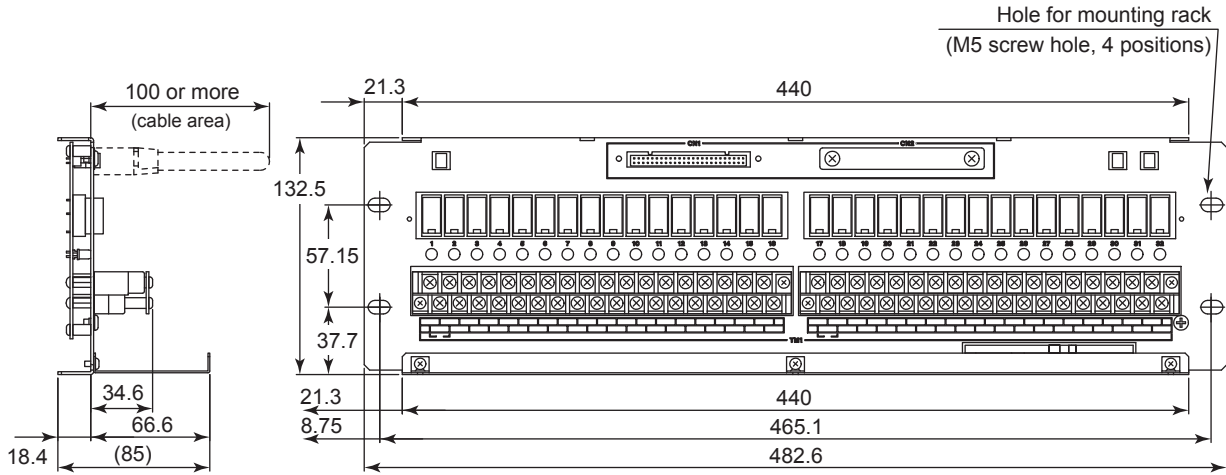

Weight: approx. 2.0 kg

When option code is "/NTRY"

Rack Mounting Dimension

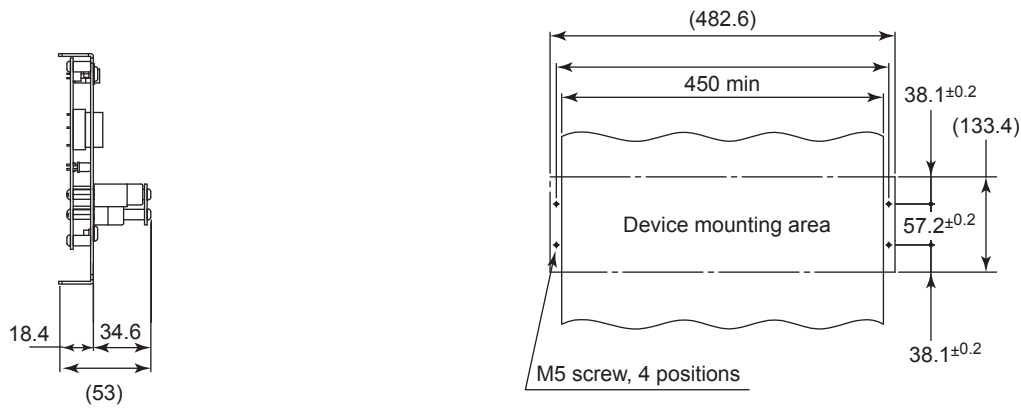

F15E.ai


Nominal Tolerances :

Nominal tolerance is ± 0.8 mm for the dimensions of 0.5 mm or more and 120 mm or less, and the combined nominal tolerance is ± 1.5 mm.

The nominal tolerance is in accordance with JEM 1459 for the dimensions over 120 mm.

For /BR3

Unit: mm

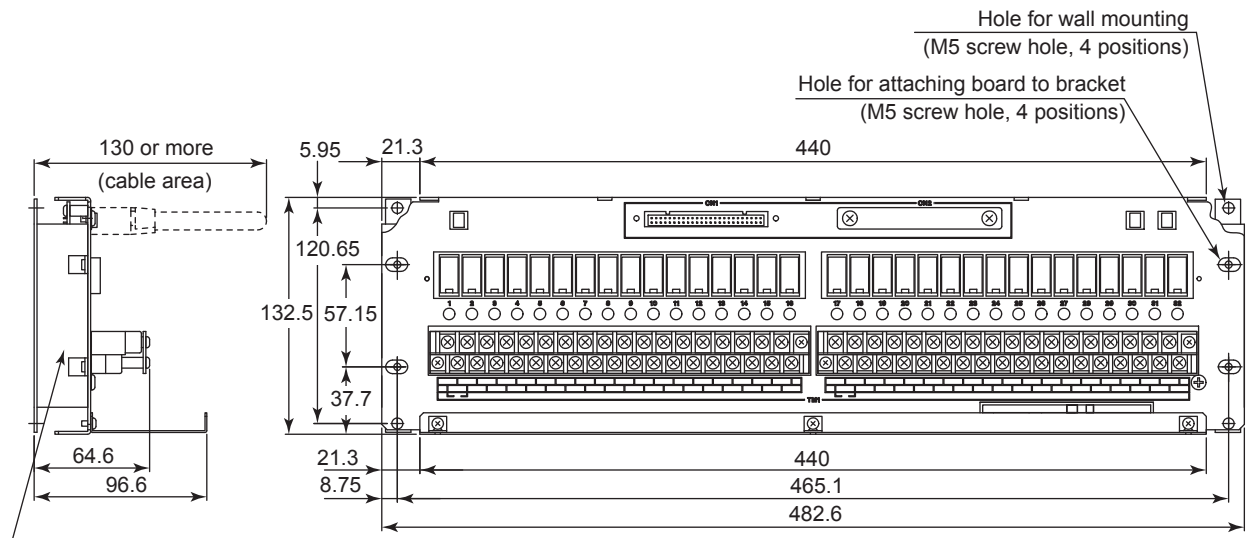


Wall mount bracket


Mount bracket first, and then board

Weight: approx. 2.2 kg

When option code is "/NTRY"



Wall Mounting Dimension

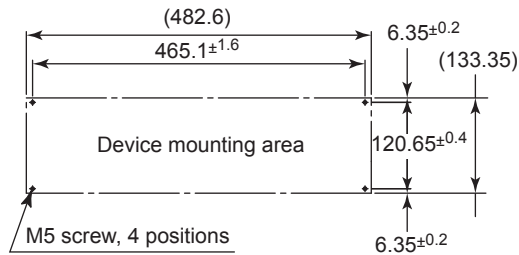

F16E.ai

Nominal Tolerances :


Nominal tolerance is ± 0.8 mm for the dimensions of 0.5 mm or more and 120 mm or less, and the combined nominal tolerance is ± 1.5 mm.

The nominal tolerance is in accordance with JEM 1459 for the dimensions over 120 mm.

● ARM55D


Other than /BR3

Unit: mm

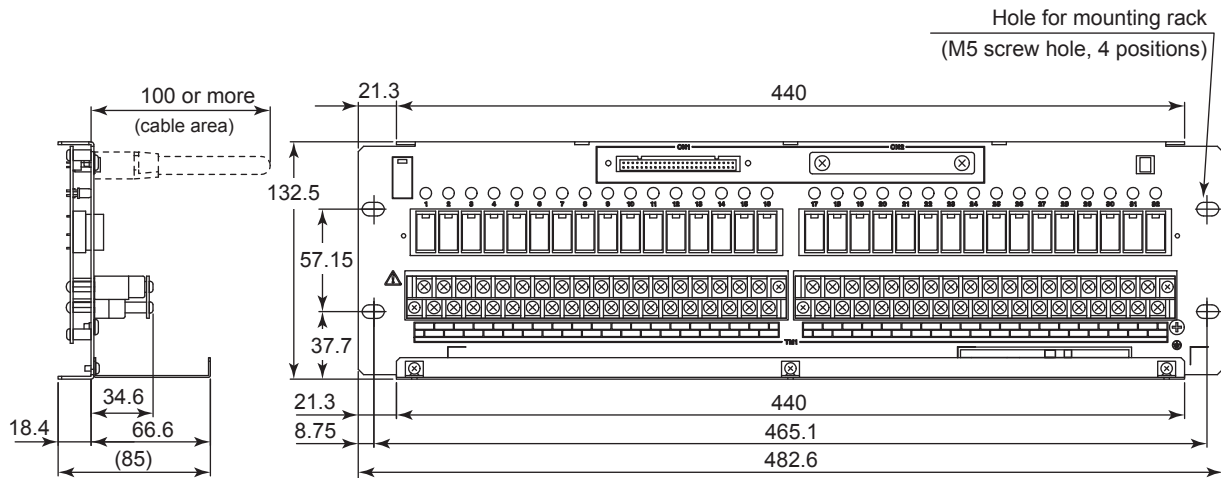


Weight: approx. 2.0 kg

When option code is "/NTRY"

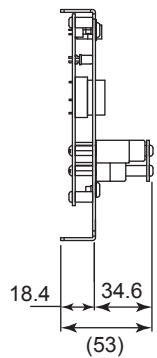

Rack Mounting Dimension

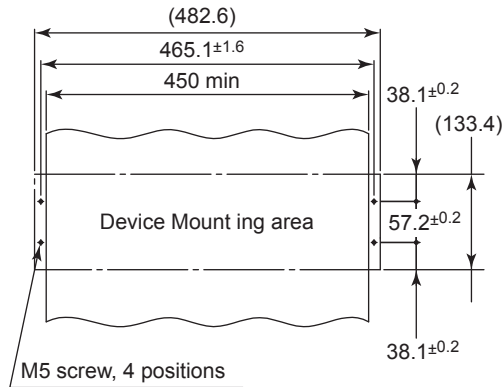

F17E.ai


Nominal Tolerances :

Nominal tolerance is ± 0.8 mm for the dimensions of 0.5 mm or more and 120 mm or less, and the combined nominal tolerance is ± 1.5 mm.

The nominal tolerance is in accordance with JEM 1459 for the dimensions over 120 mm.

For /BR3

Unit: mm

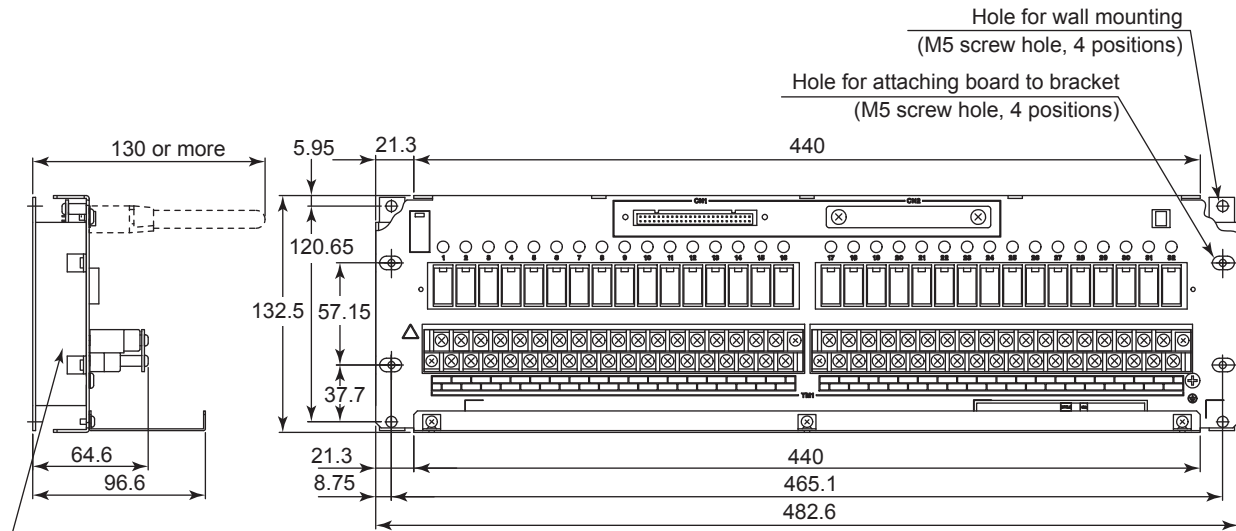


Wall mount bracket
Mount bracket first, and then board

Weight: approx. 2.2 kg

When option code is "NTRY"

Wall Mounting Dimension

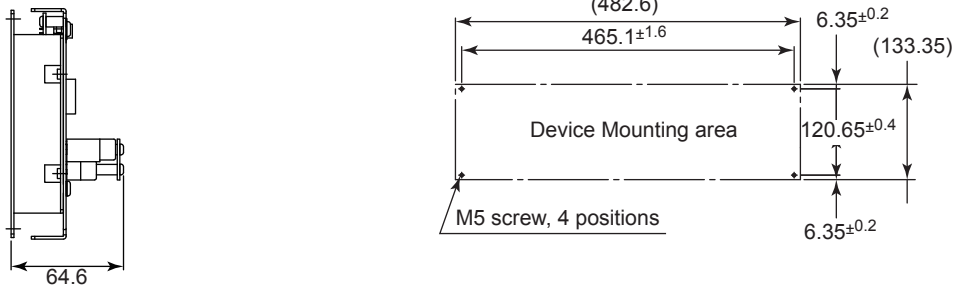


F18E.ai

Nominal Tolerances :

Nominal tolerance is ± 0.8 mm for the dimensions of 0.5 mm or more and 120 mm or less, and the combined nominal tolerance is ± 1.5 mm.
The nominal tolerance is in accordance with JEM 1459 for the dimensions over 120 mm.


● ARM55W
Other than /BR4

Unit: mm

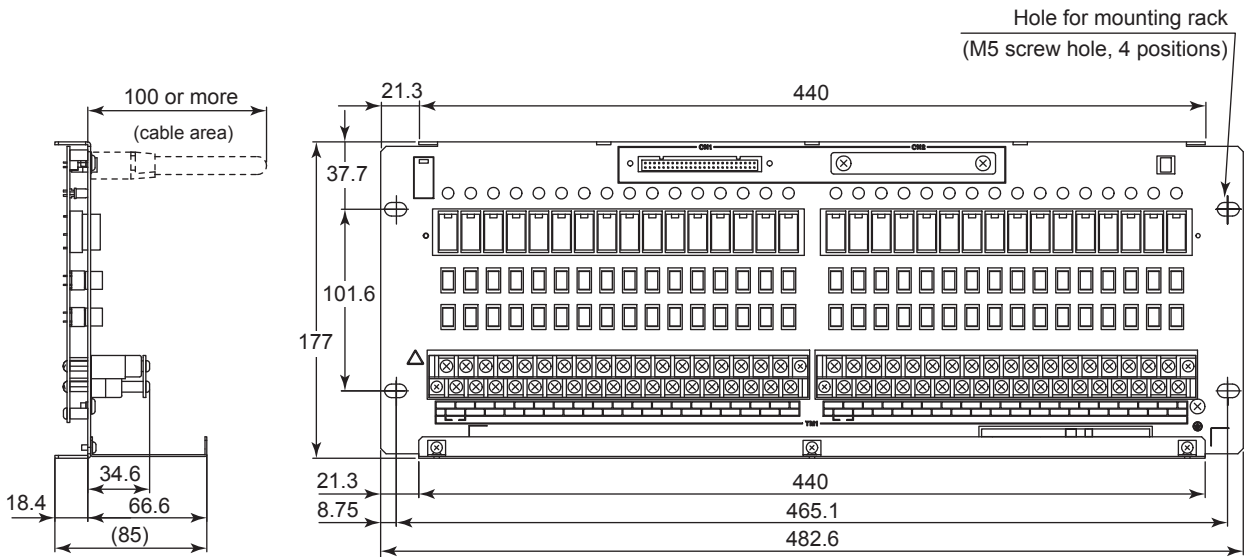


Weight: approx. 2.3 kg

When option code is "/NTRY"

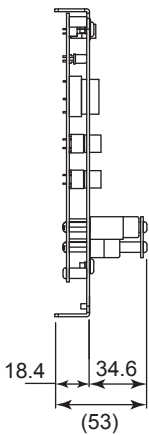

Rack Mounting Dimension

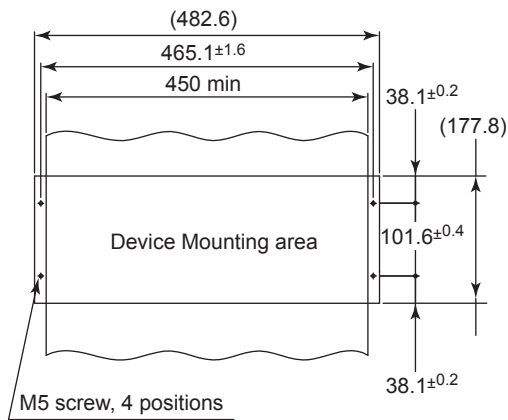

F19E.ai


Nominal Tolerances :

Nominal tolerance is ± 0.8 mm for the dimensions of 0.5 mm or more and 120 mm or less, and the combined nominal tolerance is ± 1.5 mm.

The nominal tolerance is in accordance with JEM 1459 for the dimensions over 120 mm.


For /BR4

Unit: mm

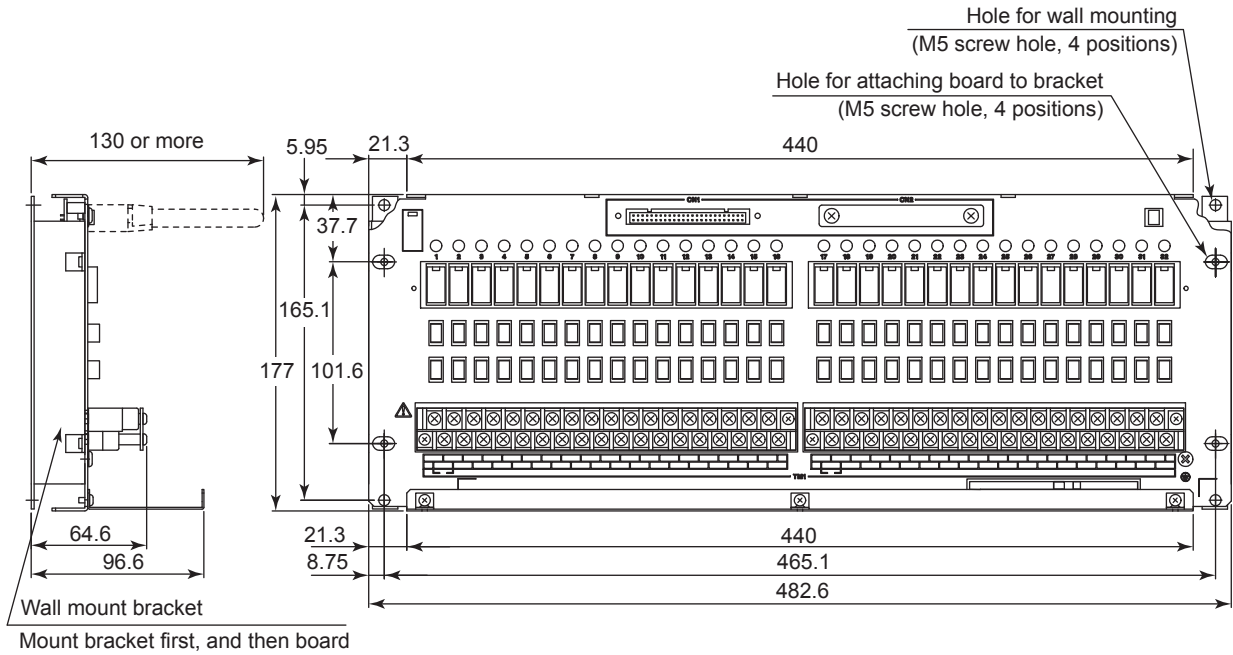


Weight: approx. 2.6 kg

When option code is "/NTRY"

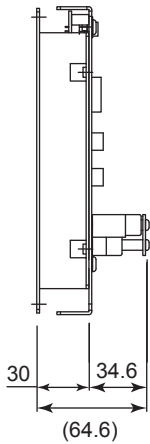

Wall Mounting Dimension

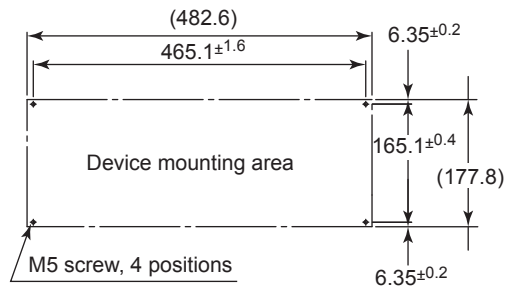

F20E.ai

Nominal Tolerances :


Nominal tolerance is ± 0.8 mm for the dimensions of 0.5 mm or more and 120 mm or less, and the combined nominal tolerance is ± 1.5 mm.

The nominal tolerance is in accordance with JEM 1459 for the dimensions over 120 mm.

● ARM55T


Other than /BR4

Unit: mm

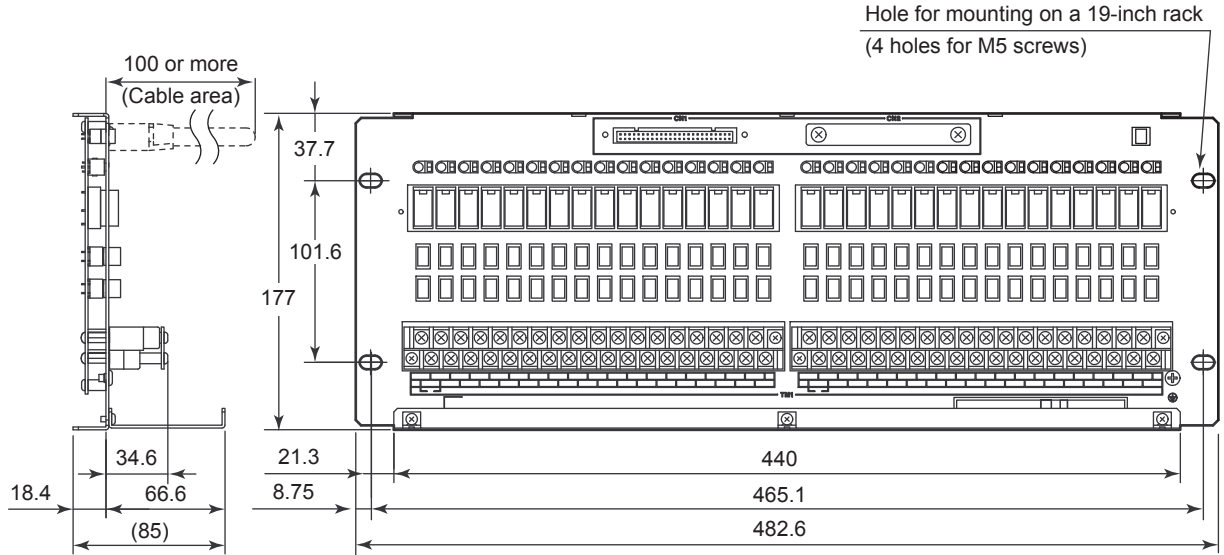


Weight : approx. 2.3 kg (5.07 lb)

When option code is "/NTRY"

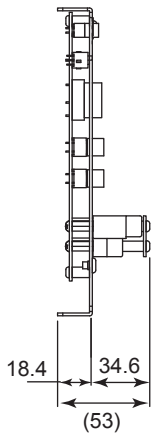

Rack mounting dimension

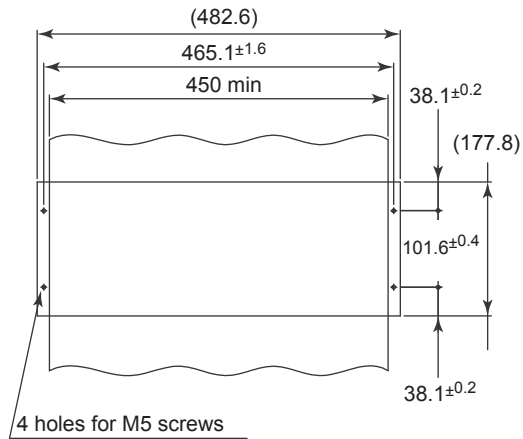

F27E.ai


Nominal Tolerances :

Nominal tolerance is ± 0.8 mm for the dimensions of 0.5 mm or more and 120 mm or less, and the combined nominal tolerance is ± 1.5 mm.

The nominal tolerance is in accordance with JEM 1459 for the dimensions over 120 mm.


For /BR4

Unit: mm

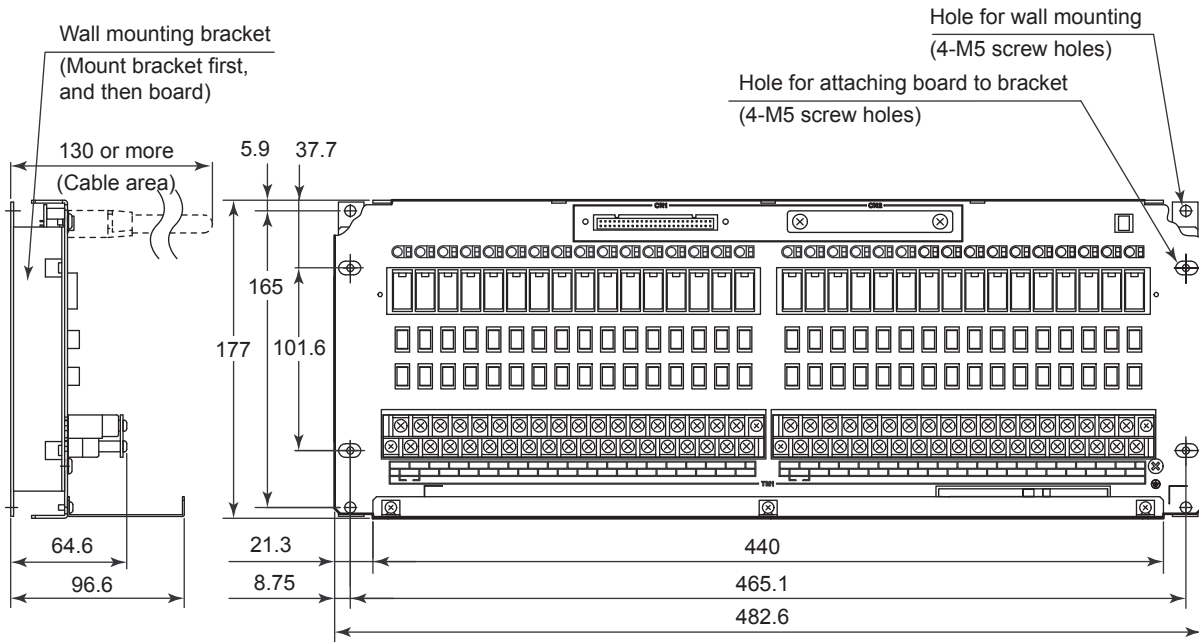


Weight : approx. 2.6 kg (5.73 lb)

When option code is "/NTRY"

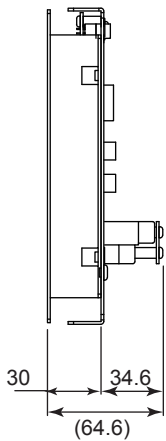

Wall mounting dimension

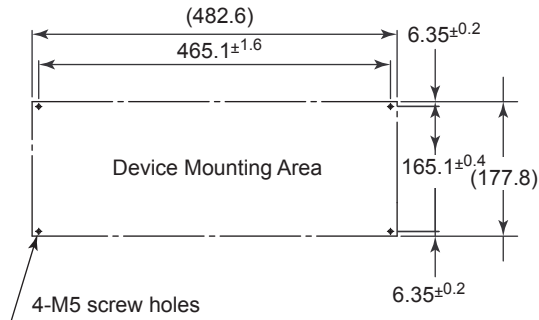

F28E.ai

Nominal Tolerances :


Nominal tolerance is ± 0.8 mm for the dimensions of 0.5 mm or more and 120 mm or less, and the combined nominal tolerance is ± 1.5 mm.

The nominal tolerance is in accordance with JEM 1459 for the dimensions over 120 mm.

● ARM55C


Other than /BR3

Unit: mm

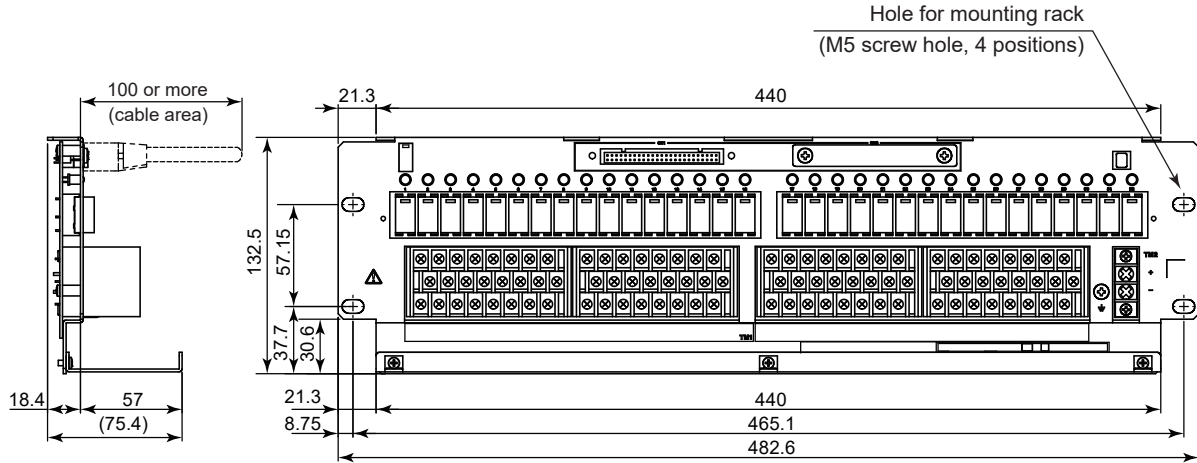


Weight: approx. 2.0 kg

When option code is "/NTRY"



Rack Mounting Dimension

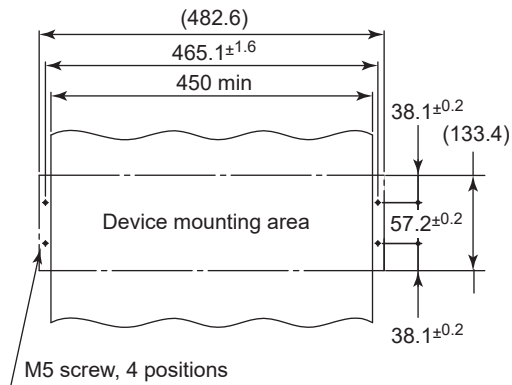

F21E.ai


Nominal Tolerances :

Nominal tolerance is ± 0.8 mm for the dimensions of 0.5 mm or more and 120 mm or less, and the combined nominal tolerance is ± 1.5 mm.

The nominal tolerance is in accordance with JEM 1459 for the dimensions over 120 mm.

For /BR3



Unit: mm

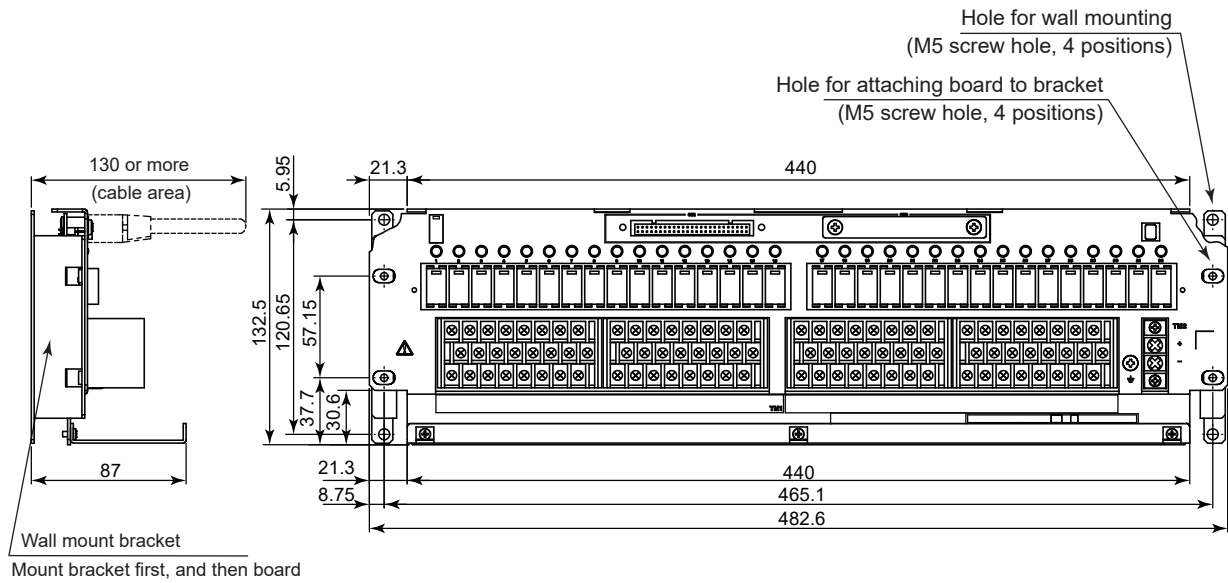

Weight: approx. 2.2 kg

When option code is "/NTRY"

Wall Mounting Dimension

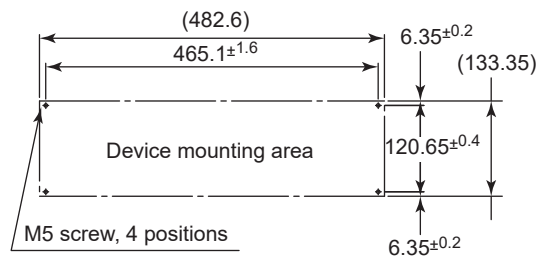

F22E.ai

Nominal Tolerances :


Nominal tolerance is ± 0.8 mm for the dimensions of 0.5 mm or more and 120 mm or less, and the combined nominal tolerance is ± 1.5 mm.

The nominal tolerance is in accordance with JEM 1459 for the dimensions over 120 mm.

● ARS15B

Other than /BR3


Unit: mm

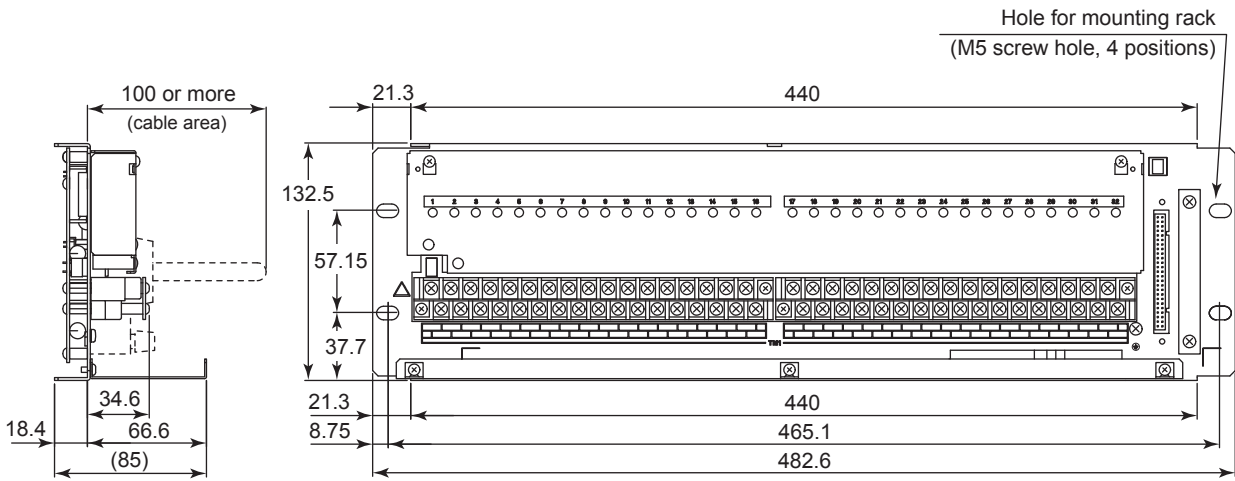

Weight: approx. 2.3 kg

When option code is "/NTRY"

Rack Mounting Dimension

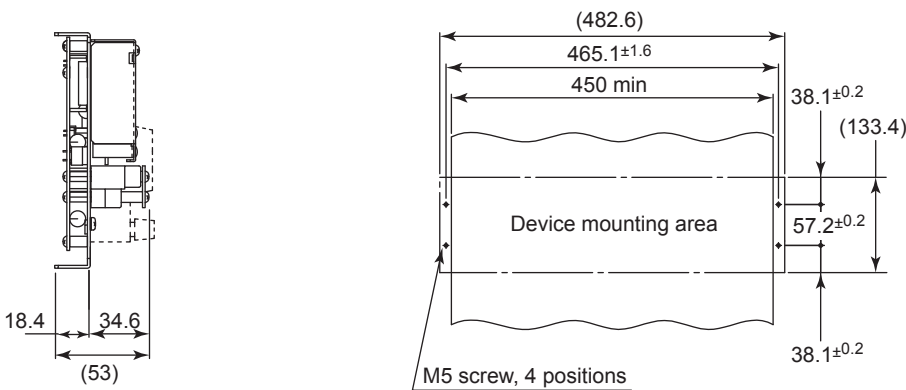

F23E.ai


Nominal Tolerances :

Nominal tolerance is ± 0.8 mm for the dimensions of 0.5 mm or more and 120 mm or less, and the combined nominal tolerance is ± 1.5 mm.

The nominal tolerance is in accordance with JEM 1459 for the dimensions over 120 mm.

For /BR3

Unit: mm


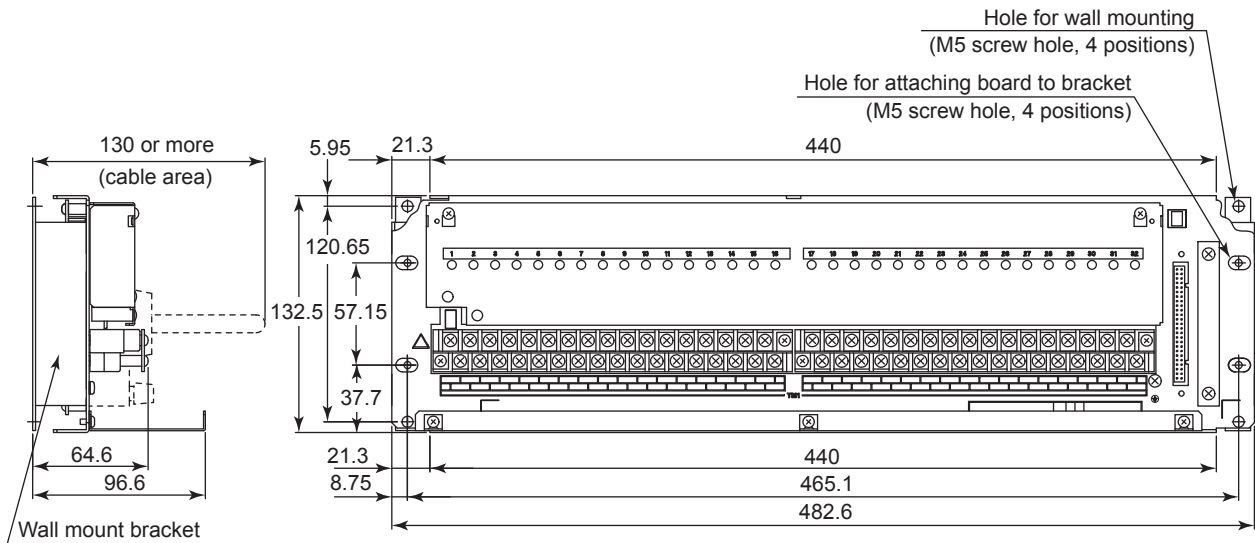


Mount bracket first, and then board

Weight: approx. 2.5 kg

When option code is "/NTRY"

Wall Mounting Dimension

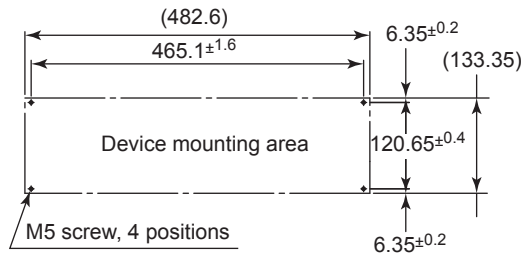


F24.ai

Nominal Tolerances :

Nominal tolerance is ± 0.8 mm for the dimensions of 0.5 mm or more and 120 mm or less, and the combined nominal tolerance is ± 1.5 mm.

The nominal tolerance is in accordance with JEM 1459 for the dimensions over 120 mm.

● ARS15M, ARS55M

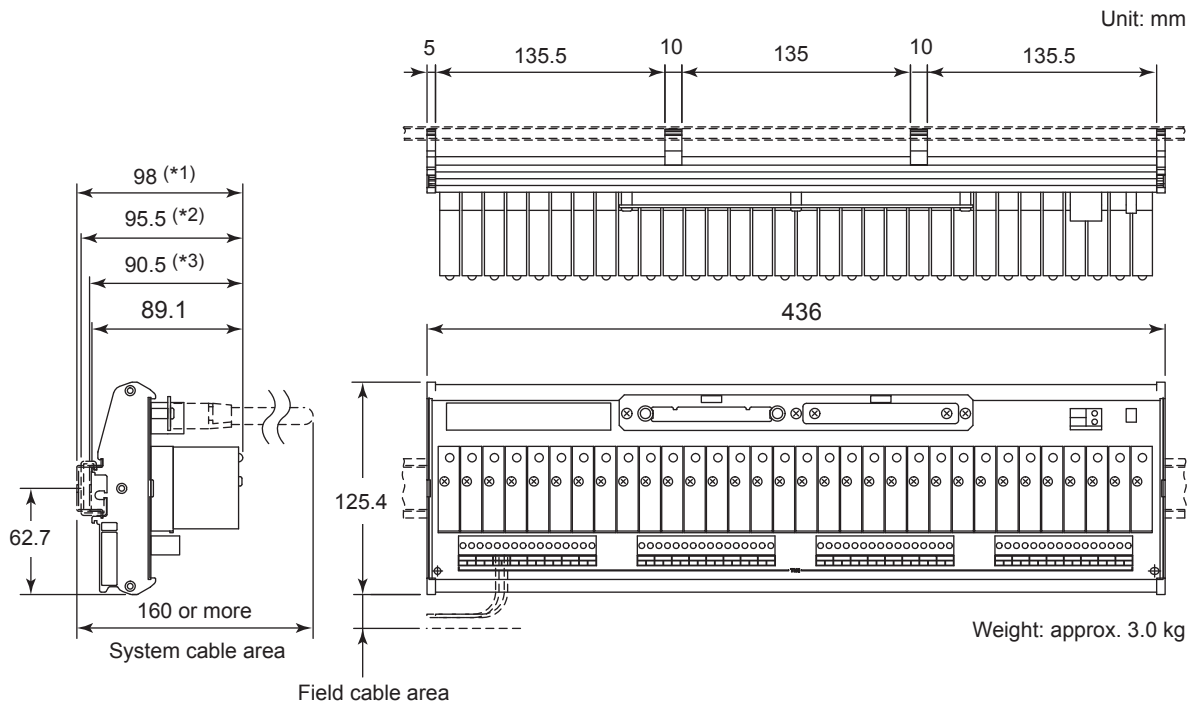

F25E.ai

Nominal Tolerances :

Nominal tolerance is ± 0.8 mm for the dimensions of 0.5 mm or more and 120 mm or less, and the combined nominal tolerance is ± 1.5 mm.

The nominal tolerance is in accordance with JEM 1459 for the dimensions over 120 mm.

- *1: Applicable DIN Rail; TH35-15, EN 50022
- *2: Applicable DIN Rail; G32, EN 50035
- *3: Applicable DIN Rail; TH35-7.5, EN 50022

■ MODELS AND SUFFIX CODES

● Mechanical Relay Board

		Description
Model	ARM15A	Machanical Relay Board (32 Dry Contact Inputs)
Suffix Codes	-0	Always 0
	0	19-inch Rack Mountable
	0	Basic Type
Option Codes	/BR3	Wall Mount Bracket
	/NTRY	Without cable tray

		Description
Model	ARM55D	Machanical Relay Board (32 Dry Contact Outputs)
Suffix Codes	-0	Always 0
	0	19-inch Rack Mountable
	0	Basic Type
Option Codes	/BR3	Wall Mount Bracket
	/NTRY	Without cable tray

		Description
Model	ARM55W	Machanical Relay Board (32 Wet Contact Outputs)
Suffix Codes	-0	Always 0
	0	19-inch Rack Mountable
	0	Basic Type
Option Codes	/BR4	Wall Mount Bracket
	/NTRY	Without cable tray

		Description
Model	ARM55T	Machanical Relay Board (32 Wet Contact Outputs with Switch)
Suffix Codes	-0	Always 0
	0	19-inch Rack Mountable
	0	Basic Type
Option Codes	/BR4	Wall Mount Bracket
	/NTRY	Without cable tray

		Description
Model	ARM55C	Machanical Relay Board (32 Dry Contact Outputs)
Suffix Codes	-0	Always 0
	0	19-inch Rack Mountable
	0	Basic Type
Option Codes	/BR3	Wall Mount Bracket
	/NTRY	Without cable tray

● Solid State Relay Board

		Description
Model	ARS15B	Solid State Relay Board (32 Solid State Inputs)
Suffix Codes	-5	For 48 V DC input
	-6	110 V DC input
	0	19-inch Rack Mountable
Option Codes	/BR3	Wall Mount Bracket
	/NTRY	Without cable tray

		Description
Model	ARS15M	Solid State Relay Board (32 Solid State Inputs)
Suffix Codes	-1	For 100 V AC input module (32-point type)
	-2	For 220 V AC input module (32-point type)
	-3	For 10 - 30 V DC input module (32-point type)
	1	DIN Rail Mountable
	0	Basic Type

		Description
Model	ARS55M	Solid State Relay Board (32 Solid State outputs)
Suffix Codes	-1	For 100 V AC output module (32-point type)
	-2	For 220 V AC output module (32-point type)
	-3	For 5-60 V DC output module (32-point type)
	1	DIN Rail Mountable
	0	Basic Type

■ CONFORMITY STANDARDS

The following table shows the applicable standards of the products.

Also refer to the GS “Integrated Production Control System CENTUM VP System Overview” (GS 33J01A10-01EN).

Table List of Applicable Standards

Model	Safety Standards					EMC Conformity Standards						Environmental Standards			
	CSA	CE	EAC	C _F	UKCA	CE	RCM	KC	EAC	C _F	UKCA	CE	UAE RoHS	UKCA	China RoHS (*2)
ARM15A	NA	NA	NA	NA	NA	X	X	X	X	X	X	X	X	X	X
ARM55D	X (*1)	X (*1)	X (*1)	X (*1)	X (*1)	X	X	X	X	X	X	X	X	X	X
ARM55W	X (*1)	X (*1)	X (*1)	X (*1)	X (*1)	X	X	X	X	X	X	X	X	X	X
ARM55T	X (*1)	X (*1)	X (*1)	X (*1)	X (*1)	X	X	X	X	X	X	X	X	X	X
ARM55C	NA	NA	NA	NA	NA	X	X	X	X	X	X	X	X	X	X
ARS15B-5	NA	NA	NA	NA	NA	X	X	X	X	X	X	X	X	X	X
ARS15B-6	-	-	-	-	-	-	X	X	-	-	-	-	-	-	X
ARS15M-1	-	-	-	-	-	-	X	X	-	-	-	-	-	-	X
ARS15M-2	-	-	-	-	-	-	X	X	-	-	-	-	-	-	X
ARS15M-3	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
ARS55M-1	-	-	-	-	-	-	X	X	-	-	-	-	-	-	X
ARS55M-2	-	-	-	-	-	-	X	X	-	-	-	-	-	-	X
ARS55M-3	NA	NA	NA	NA	NA	-	X	X	-	-	-	-	-	-	X

X: Compliant -: Non-compliant NA: Not Applicable

*1: For DC, 30 V or less is the requirement for the Safety Standard.

*2: The product information required by the law is disclosed on the Yokogawa's website. Please refer to the following web site.
<http://www.yokogawa.com/dcs/CNRoHS/>

■ ORDERING INFORMATION

Specify models, suffix codes, and option codes when ordering.

■ TRADEMARK ACKNOWLEDGMENT

The names of corporations, organizations, products and logos herein are either registered trademarks or trademarks of Yokogawa Electric Corporation and their respective holders.